PART NO.	DESCRIPTION	QTY.
RAIDER	RAIDER SEAL GASKET	2
LIFTWRL18	1/8"x 6-1/2" GALVANIZED WIRE LOOP ROPE LIFTER	2
RUB01ROLL	1" BUTYL MASTIC SEALANT 14'-6" ROLL	3
4PVCSANT	4" PVC SANITARY TEE	2
PIPE4SD	4" S&D PIPE (FT)	3

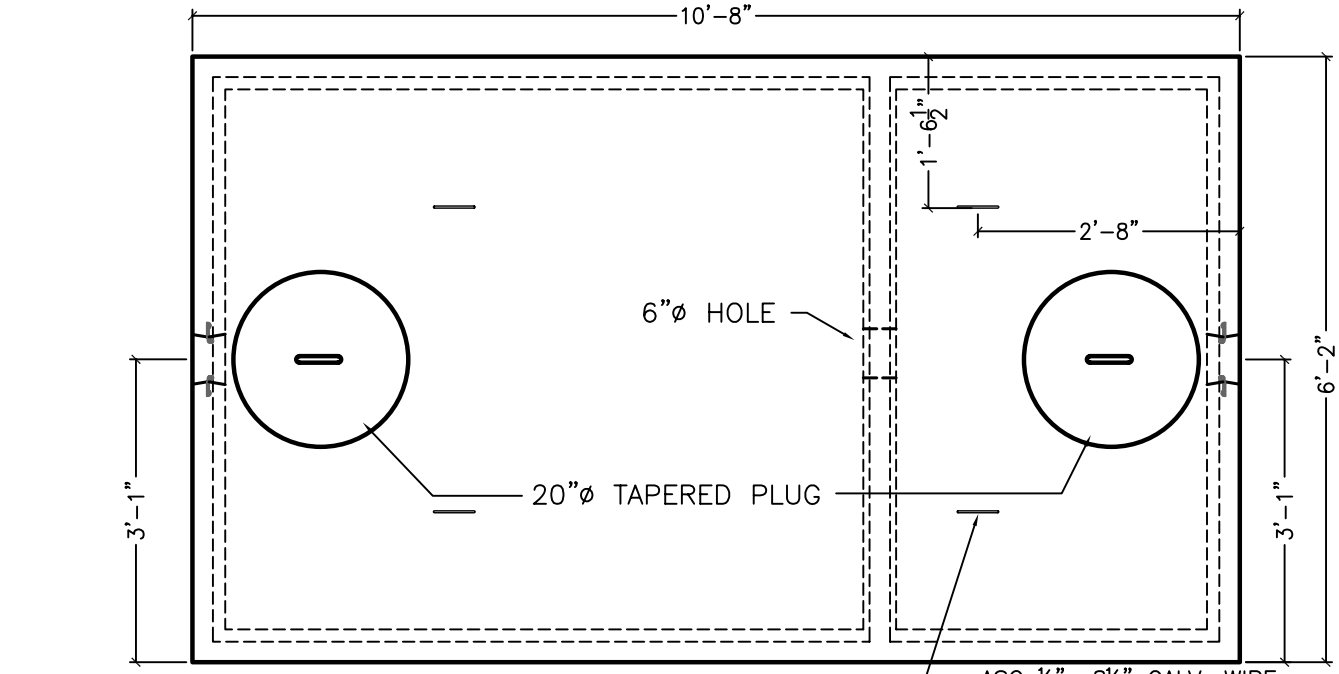

PLAN VIEW

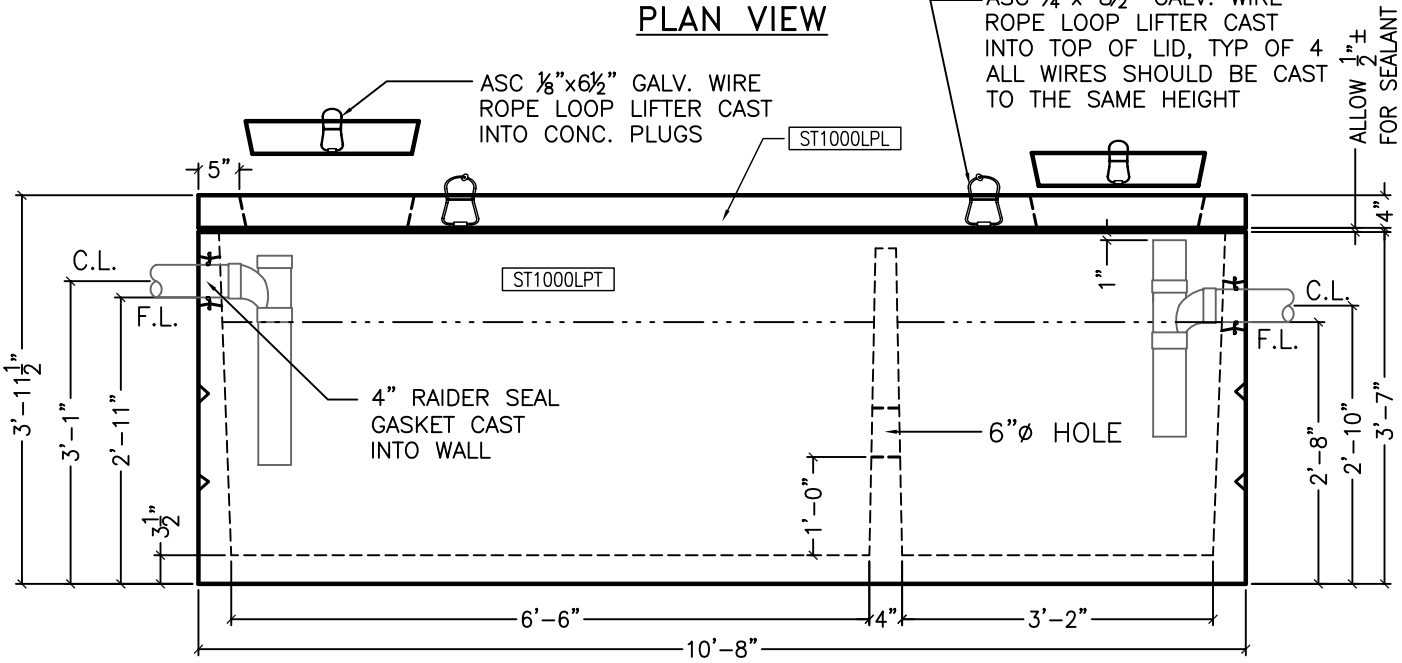

SECTION VIEW

NOTES:
1. SECONDARY COMPARTMENT HAS VOLUME EQUAL TO APPROXIMATELY 1/3 OF TOTAL CAPACITY
2. ALL WALLS ARE TAPERED FROM 4" WIDE AT THE BOTTOM AND 2-1/2" WIDE AT THE TOP.
3. FLOOR THICKNESS IS 3-1/2"
4. REQUIRED HOLE SIZE: 13'-0"x8'-6"

WEIGHT/CONCRETE		
LID	3,157 LBS	0.81 CY
VAULT	7,461 LBS	1.92 CY
TOTAL	10,618 LBS	2.73 CY

05/20/09

COLORADO PRECAST CONCRETE, Inc.
1820 E. HIGHWAY 402, LOVELAND, CO 80537
(970) 669-0535 FAX (970) 669-0674
www.coloprecast.com

ITEM NAME:

1000 GALLON LOW PROFILE SEPTIC TANK

THIS DOCUMENT IS THE PROPERTY OF COLORADO PRECAST CONCRETE, INC. (C.P.C.) AND IS TO BE USED FOR REFERENCE ONLY. IT SHALL NOT BE REPRODUCED IN ANY WAY HARMFUL TO THE INTERESTS OF C.P.C.