PART NO.	DESCRIPTION	QTY.
RUB01ROLL	1" BUTYL MASTIC SEALANTx14'-6"	2
RAIDER	RAIDER SEAL GASKET	2
LIFTWRL18	1/8"X6 1/2" GALV WIRE ROPE LIFTER	3
4PVCSANT	4" PVC SANITARY TEE	2
PIPE4SD	4" S&D PIPE (FT)	3

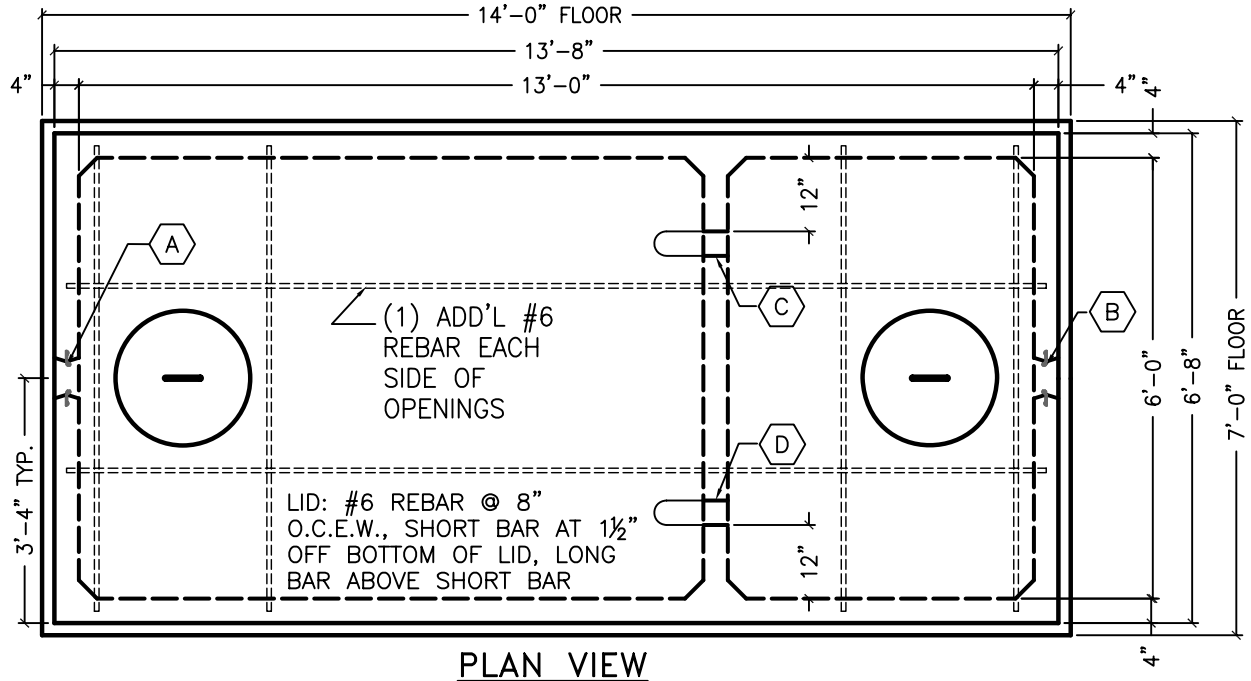

PLAN VIEW

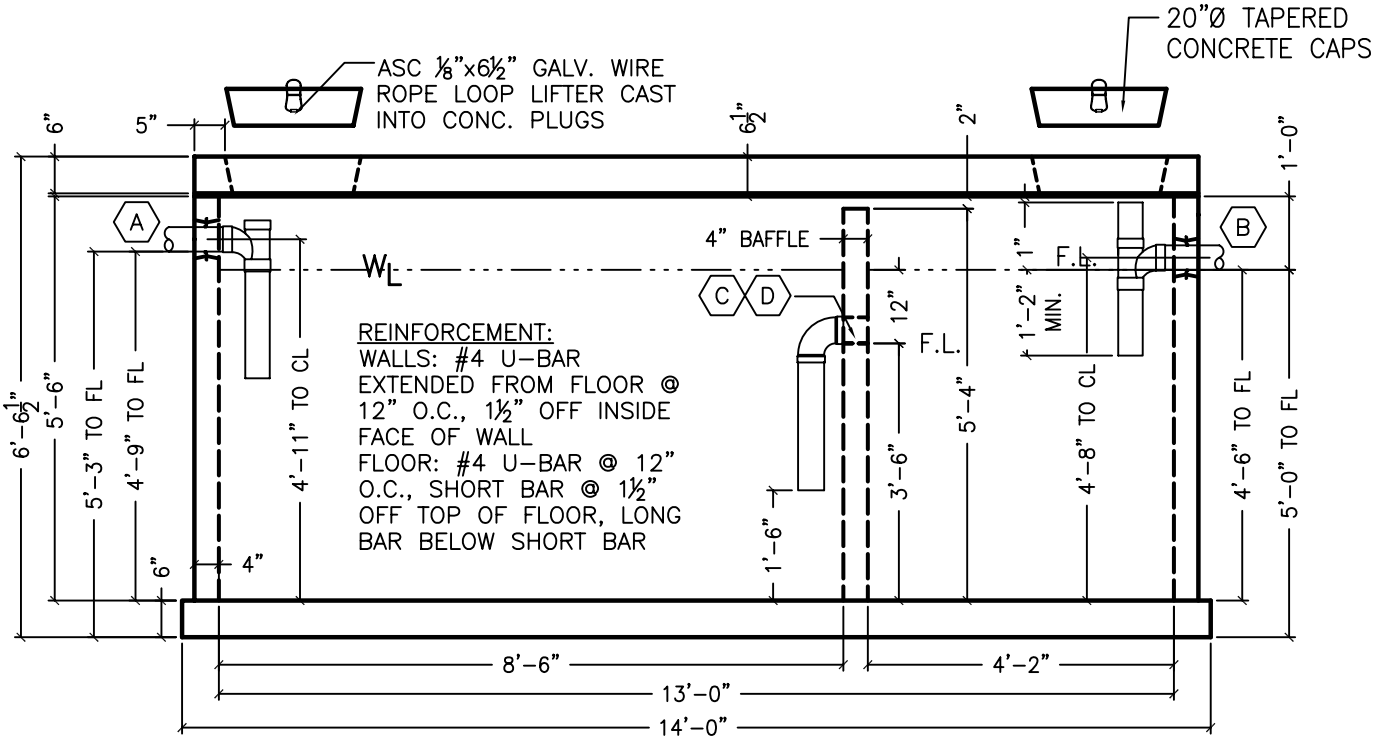

SECTION VIEW

(A)(B) RAIDER SEAL GASKET FOR 4"Ø PIPE

(C)(D) 4"Ø PVC COUPLER CAST INTO BAFFLE

1. SECONDARY COMPARTMENT HAS VOLUME EQUAL TO APPROXIMATELY 1/3 OF TOTAL CAPACITY.
2. WALL THICKNESS: 4"
3. FLOOR THICKNESS: 6"
4. HOLE SIZE: 16'-0"x9'-0"

WEIGHT/CONCRETE		
LID	6,362 LBS	1.57 CY
WALLS+BAFFLE	12,363 LBS	3.05 CY
FLOOR	7,350 LBS	1.81 CY
WALLS+BFL+FLOOR	19,713 LBS	4.87 CY
TOTAL	26,075 LBS	6.44 CY

05/19/09

COLORADO PRECAST CONCRETE, Inc.
1820 E. HIGHWAY 402, LOVELAND, CO 80537
(970) 669-0535 FAX (970) 669-0674
www.coloprecast.com

ITEM NAME:

2500 GALLON SEPTIC TANK

THIS DOCUMENT IS THE PROPERTY OF COLORADO PRECAST CONCRETE, INC. (C.P.C.) AND IS TO BE USED FOR REFERENCE ONLY. IT SHALL NOT BE REPRODUCED IN ANY WAY HARMFUL TO THE INTERESTS OF C.P.C.